JOB:	
ITEM NO:	



INSULATED STAINLESS STEEL TOWEL WARMERS AW-SPA SERIES

FEATURES AND BENEFITS:

- When used at recommended temperatures, this unit drastically reduces the risk of contamination from MRSA and other infectious viruses and bacteria.
- Warms and Holds standard or larger bath towels as well as other items needed to keep warm, safe, and dry
- (3) shelves per half size unit (6) shelves per full size unit
- Warms a full load of towels in 4 hours or less
- No fans or blowers means quiet, noise-free operation
- Radiant heat for even temperature all the way to the center not just the outer towels
- Compatible with standard 120V outlet.
- One cord powers both cabinets on full-size model.
- Stainless steel construction throughout.
- Insulated field reversible doors for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



AWSF2MSPA

AWSHMSPA


(Shown with customized "wooden" panel graphics.)

ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handles
- Corner Bumpers
- Perimeter Bumper
- Solid Doors No Windows
- Various Caster Options
- Custom Graphics
- □ 240 Volt Service



Feb., 2024

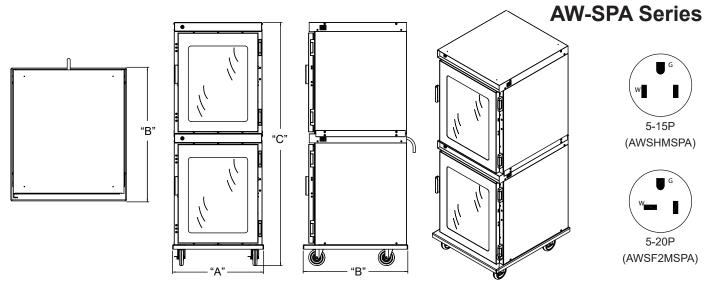

CRES COR MODEL NO.	CAPACITY			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT
	TOWELS	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		ACT.
AWSF2MSPA	60		IN	28-1/16	32-1/4	75-1/8	18-1/16	26-1/4	24-7/8	LBS	380
			MM	715	820	1910	460	670	635	KG	172
AWSHMSPA	30	SEE NOTE	IN	28-1/16	32-1/4	40-3/4	18-1/16	26-1/4	24-7/8	LBS	209
		BELOW	MM	715	820	1035	460	670	635	KG	95

NOTES: 1. All construction rivted, welded and finished.

2. Towel capacity is approximate based on standard 27" x 52" bath towels; towel sizes and capacities may vary.

CABINETS:

- Body: 22 ga. 304 stainless steel compartments
- Reinforcement: Internal channel frame, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is. 23 at 75°F. 1-1/2" in walls; 1" in door, top, and bottom.

BASE:

- One piece construction, .125 aluminum.
- Casters: 5" dia., modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Front casters equipped with brakes.

DOORS (Windows):

- Field reversible
- Formed 22 ga. stainless steel.
- Latches: Magnetic type.
- Windows: 3/16" Lexan
- Hinges: Heavy duty chrome plated steel
- Gaskets: Perimeter type, silicone.

5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267 www.crescorsport.com © Crescent Metal Products, Inc. 2024 All rights reserved.

ELECTRICAL COMPARTMENTS:

- · Control panels: Black coated .063 aluminum
- Cover: 100 ga. aluminum
- Thermostat (top): Pre-set to 180°F.
- Thermostat (bottom): Pre-set to 140°F.
- Power cord: Permanent, 6 ft., 12/3 ga. with right angle plug. Single cord powers both cabinets.
- Heaters (3 ea. compartment): 300 Watts each.
- Digital thermometers.

POWER REQUIREMENTS:

- Full-Size: 1800 Watts, 120 Volts, 60 Hz., single phase, 15 amps, 20 amp. service.
- Half-Size: 900 Watts, 120 Volts, 60 Hz., single phase, 7.5 amps, 15 amp. service.

SHORT FORM SPECIFICATIONS

In line with its policy to continually improve its products, CRES COR SPORT reserves the right to change materials and specifications without notice.